Channel Rail Adaptor



Group

STAUFF

2

3

5


1D

2D

3D

4D

5D





Thread G


1/4-20 UNC

5/16-18 UNC

5/16-18 UNC

M8

STAUFF Group 1D Dimensions (mm/in)



STAUFF Group 2-3D / 4-5D

Н3

20,5

.81

23,5

23,5

.93

H2

13

17

.67

Order Codes

(Standard Options)

CRA 1-8/1D M W3


CRA 1-8/1D U W3

CRA 2-3D M W3

CRA 2-3D U W3

CRA 4-5D M W3

CRA 4-5D U W3



Components: Dimensions / Order Codes

Order Codes		
Adaptor	*CRA*1-8/1D*N	1*W3
* Channel Rail Adaptor		CRA
* STAUFF Group	1D (DIN Group 1) 2D to 3D (DIN Group 2 to 3) 4D to 5D (DIN Group 4 to 5)	1-8/1D 2-3D 4-5D
* Thread code	Metric ISO thread Unified coarse (UNC) thread	M U
* Material code	Carbon Steel, zinc/nickel-plated	W3
	Stainless Steel V4A 1.4401 / 1.4571 (AISI 316 / 316	Ti) W5

(for Use with Various Channel Rails) Type CRA

The Channel Rail Adaptor, type CRA 1-8/1D is also suitable for Standard Series, STAUFF Group 1 to 8.

L2 L3

35 40

1.38 1.57 .63

1.38

35 38

1.38

38 53

1.50 2.09 .75

1.50 3.15 .75 .3

21

.83

21 35

.83

.83

В1 B2 H1

16

80

19 6

.75

19 9

19


.24 .51

.35 .67

All threaded parts are available with Metric ISO thread or unified coarse (UNC) thread according to dimension table. Alternative materials and surface finishings are available upon request. Consult STAUFF for further information.

Compatibility with Channel Rails



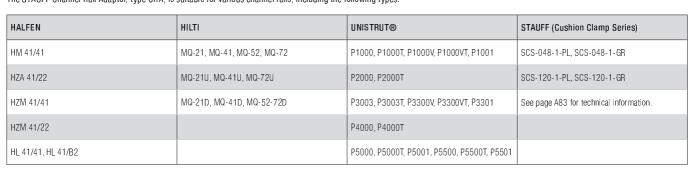

Consult STAUFF to check compatibility with additional types of channel rails

