



STAINLESS STEEL PIPES

Literature



One of the most supplied in Chuan Kok's product range is stainless steel pipes. Stainless steel pipes are consumed in high performance fluid or gas line application. Most clients requests for seamless stainless steel pipes due to their corrosion resistance and ability to withstand pressure.



Figure 1: Stainless Steel Pipe Specifications

Introduction:

Chuan Kok keep stock for seamless stainless steel pipes in dual grade SS316/SS316L. The stainless steel pipes are in accordance to ASTM A312. ASTM A312 is the standard specification for seamless, welded, and heavily cold worked austenitic stainless steel pipe.

Stainless Steel Pipe Attributes:

The minimum yield strength for stainless steel pipes is 515 N/mm² while minimum yield strength at Rp 0.2% at 205 N/mm². Stainless steel pipes contain at least 10.5% of chromium. This allows it to form an invisible chrome-oxide layer by reaction with oxygen.

SS316/316L is a chromium-nickel-molybdenum bearing austenitic stainless steel. The molybdenum content in stainless steel pipe is around 2.0% to 3.0%, while nickel content is around 11% to 14%. The nickel and molybdenum content provides great corrosion resistance in corrosive surroundings, such as salt water or chloride environments. In addition, SS316/316L material will reduce the tendency of the material to crack after welding. It also provides higher tensile strength at elevated temperature.

The meaning of "L" designation in SS316L grade is that carbon content is restricted to 0.03% where the normal carbon content in stainless steel SS316 is 0.08%. The lesser the carbon content the stainless steel has, the greater it is in weldability. And it also prevents chromium from being depleted, thus, it can still form the chrome oxide layer on the pipe surface.

Stainless Steel Pipe Finishing:

Pipes are supplied in 1 type of finishing which is Annealed and Pickled. Annealing is a heat treatment that alters the physical and chemical properties of the material. It also increases the ductility and reduces the stainless steel pipe hardness. Pickling is a metal surface treatment that contains acid to remove the impurities on the pipe surface.



Figure 2: Annealed & Pickled Stainless Steel Pipe

Stainless Steel Pipe's Pipe Ends:

Outer Diameter and Wall Thickness Specifications:

Pipes outer diameter (OD) is in accordance to ASTM A312. The tolerance of pipe outer diameter and wall thickness are as below:

Pipe Outer Diameter	ASTM A312 Outer Diameter Tolerance	ASTM A312 Wall Thickness Tolerance
1/8"NB – 1 1/2"NB	+ 0.4MM, - 0.8MM	+/- 12.5%
2"NB – 4"NB	+/- 0.8MM	+/- 12.5%
5"NB – 8"NB	+1.6MM, - 0.8MM	+/- 12.5%

From table above, for pipes OD that range from 1/8"NB – 1 1/2"NB, the standard OD tolerance is +0.4mm, -0.8mm. For Chuan Kok's pipe sizes 1/8"NB – 1 1/2"NB, we control the OD tolerance to be ±0.4mm. For 2"NB - 4"NB, the standard OD tolerance is ±0.8mm to which our pipes comply. For 5"NB - 8"NB pipes, the standard OD tolerance is +1.6mm, -0.8mm.

For pipes wall thickness, the specifications are +/- 12.5%. However, we regulate the wall thickness to +/- 10%.



Figure 3: Stainless Steel Pipe "SCH" thickness

Stainless Steel Pipe Wall Thickness:


Wall thickness of stainless steel pipe is expressed in “schedules”, abbreviated as SCH. Thickness of stainless steel pipes can be divided to several groups such as SCH10S, SCH40S, SCH80S, SCH160S and SCHXXS. These represent different kind of thickness which depends on the pipe’s outer diameter (OD).

Please refer below table for stainless steel pipes wall thickness.

Pipe Size (NB)	Outer Diameter (MM)	Wall Thickness (MM)				
		SCH10S	SCH40S	SCH80S	SCH160S	SCHXXS
1/8	10.3	1.24	1.73	2.41	-	-
1/4	13.7	1.65	2.24	3.02	-	-
3/8	17.1	1.65	2.31	3.20	-	-
1/2	21.3	2.11	2.77	3.73	4.77	7.47
3/4	26.7	2.11	2.87	3.91	5.56	7.82
1	33.4	2.77	3.38	4.55	6.35	9.09
1 1/4	42.2	2.77	3.56	4.85	6.35	9.70
1 1/2	48.3	2.77	3.68	5.08	7.14	10.16
2	60.3	2.77	3.91	5.54	8.74	11.07
2 1/2	73.0	3.05	5.16	7.01	9.52	14.02
3	88.9	3.05	5.49	7.62	11.12	15.24
3 1/2	101.6	3.05	5.74	8.08	-	16.15
4	114.3	3.05	6.02	8.56	13.49	17.12
5	141.3	3.40	6.55	9.52	15.87	19.05
6	168.3	3.40	7.11	10.97	18.26	21.95
8	219.1	3.76	8.18	12.70	23.01	22.22

Stainless steel pipes manufacturing process is illustrated in the next page.

Stainless Steel Pipes Manufacturing Process

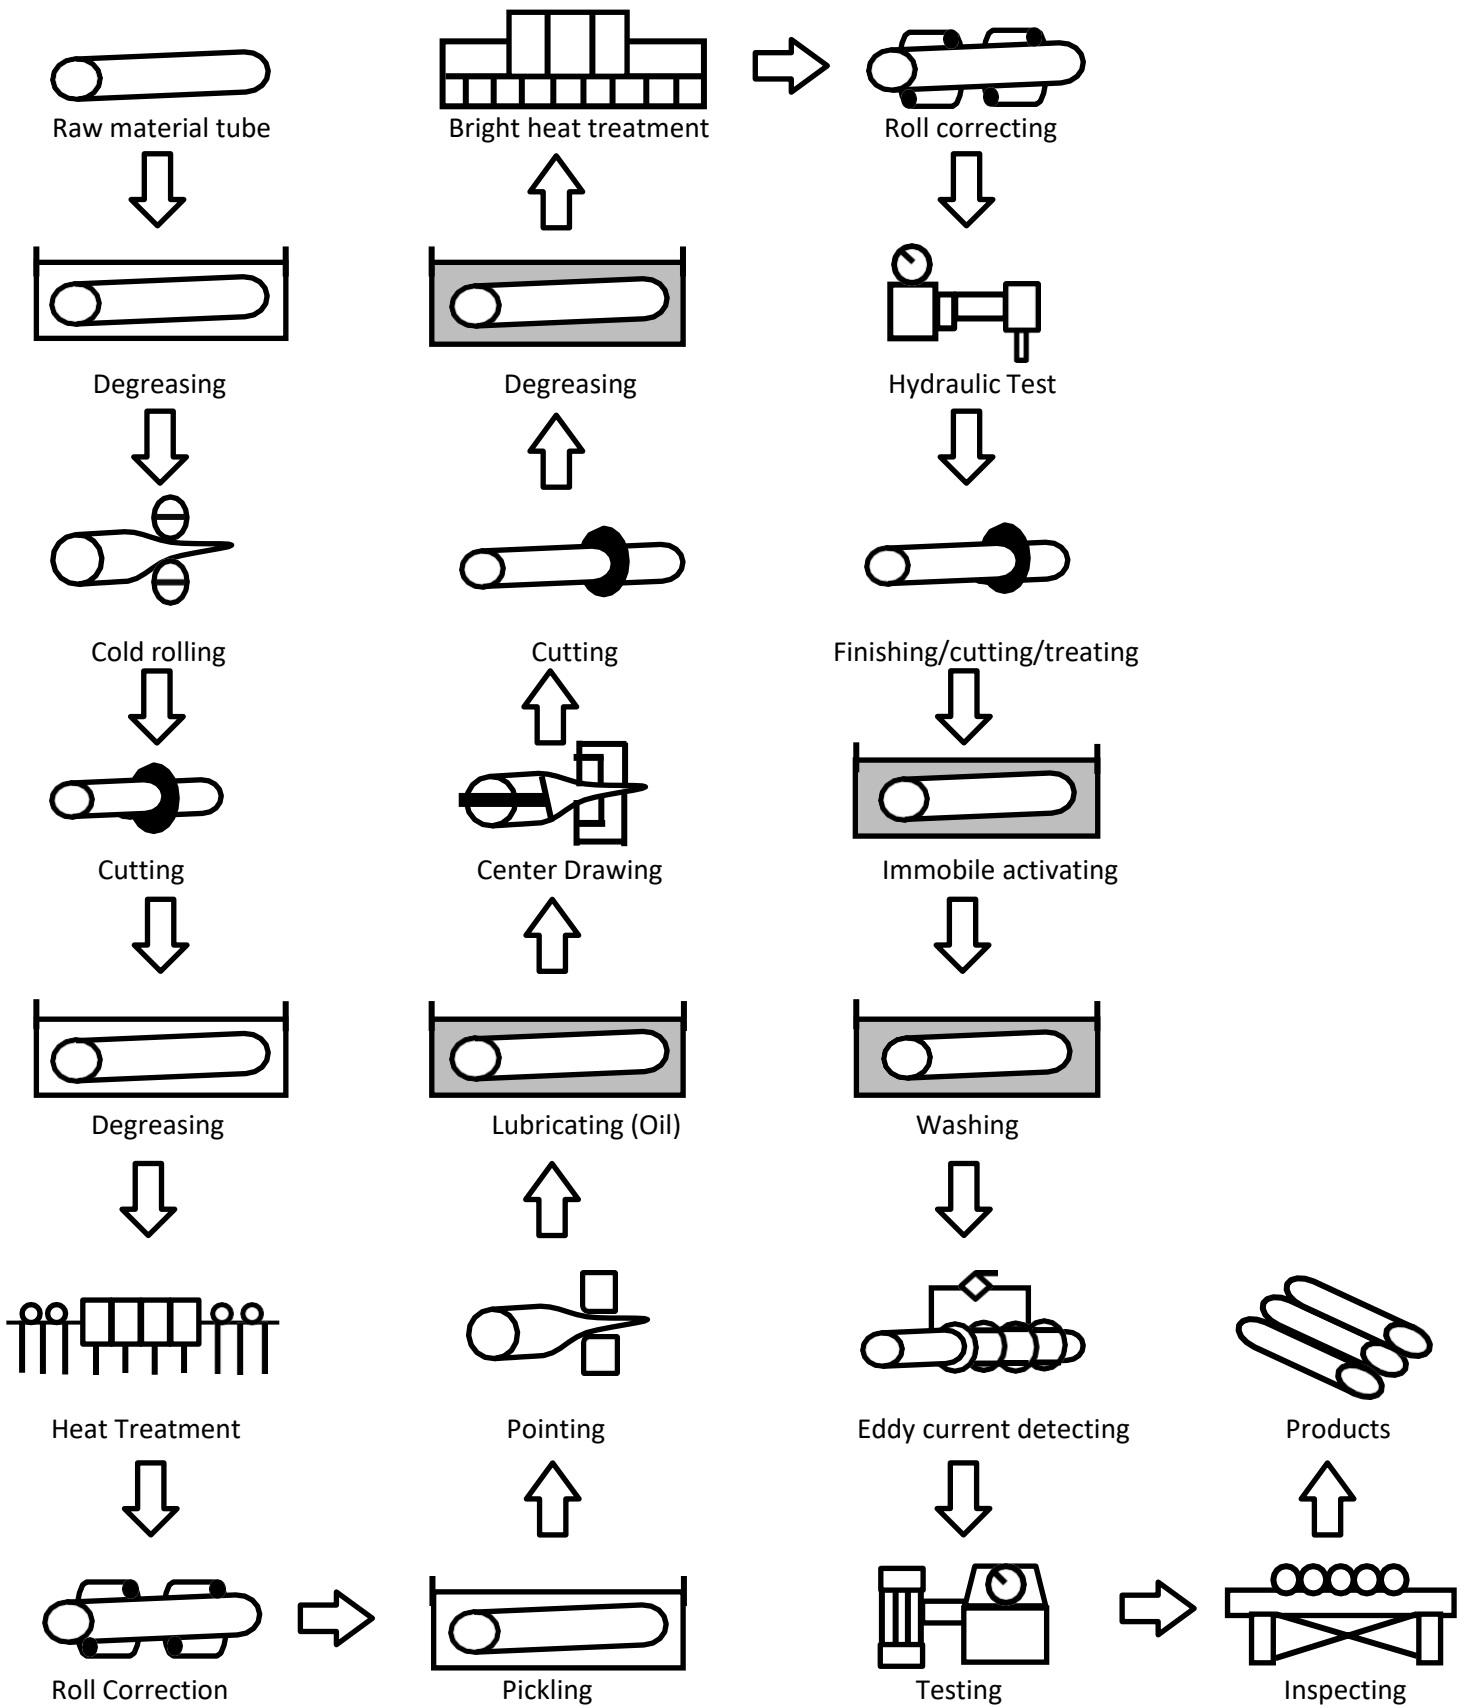

Chuan Kok Hardware & Machinery Pte Ltd

Address : 1783 Geylang Bahru, #01-02, Singapore 339708
Telephone Number : +65 6294 2566
Email Address : info@chuankok.com
Website : www.chuankok.com
Business Registration Number : 198201577Z
Country of Registration : Singapore

Conditions of Use of Catalogue:

The information in the catalogue are not binding and in order to improve distribution, Chuan Kok Hardware & Machinery Pte Ltd reserves the right to make any change including size and pressure ratings considered necessary at any time and without prior notice. According to the copyright and the civil law, any reproduction (also partial) of figures and texts of this catalogue by means of electronic, mechanical, photocopies, microfilms, recordings or other is forbidden without Chuan Kok Hardware & Machinery Pte Ltd's authorization.
Catalogue Version: 2021

